


DIN 916

ISO 4029
ГОСТ 28964-91

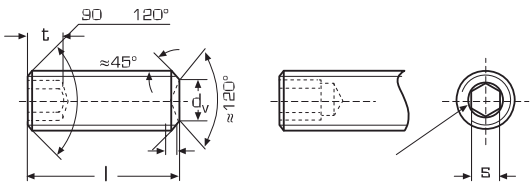

Винт стопорный с внутренним конусом
Нержавеющая сталь A2 (AISI 304)/A4 (AISI 316)

dt	-	-	-	-	-	1,5	2,0	2,5	3,0	4,0	5,0
t	0,8	1,2	1,2	1,5	2,0	2,0	3,0	4,0	4,8	6,4	8,0
e	1,003	1,427	1,73	2,3	2,87	3,44	4,58	5,72	6,86	9,15	11,43
s	0,9	1,3	1,5	2,0	2,5	3,0	4,0	5,0	6,0	8,0	10,0

d1	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 16	M 20
I 2											
3	0,004	0,008	0,008								
4	0,006		0,014	0,018	0,034						
5	0,007	0,012	0,018	0,026	0,042	0,065					
6	0,009	0,020	0,022	0,038	0,054	0,074	0,125				
8	0,012		0,031	0,053	0,078	0,109	0,188				
10	0,015	0,025	0,040	0,068	0,102	0,144	0,251	0,300			
12			0,049	0,083	0,126	0,179	0,314	0,473	0,622		
14				0,097							
16			0,067	0,113	0,174	0,249	0,440	0,673	0,950	1,504	
20			0,085	0,143	0,122	0,319	0,566	0,871	1,230	2,090	
25				0,177	0,282	0,407	0,725	1,120	1,590	2,740	
30				0,200	0,442	0,495	0,884	1,370	1,950	3,400	
35					0,442	0,583	1,040	1,620	2,310	4,050	
40					0,464	0,671	1,200	1,870	2,670	4,710	7,230
45						0,759	1,360	2,120	3,030	5,400	
50						0,847	1,494	2,315	3,390	6,000	
55						0,935			3,750	6,085	
60						1,006	1,768	2,870	4,110	7,400	
70							2,148		3,750		
	500	500	500	200	200	200	100	100	50	25	25

Вес 100 шт./кг